

TRANSVERSAL MOBILE COUPLING WITH TOOTHED SECTORS, KINEMATICS AS MULTIBODY SYSTEM

Gavrila Cornel Cătălin

Transilvania University of Braşov, cgavrila@unitbv.ro

Keywords: Mobile coupling, multibody system, gear, geometrical and kinematical constraints.

Abstract: Mechanical systems definition as multibody systems is a modern way of modeling aiming to the real time simulation of complex product's dynamic behavior. The paper presents aspects regarding the kinematics of a mobile transversal coupling with toothed sector, as multibody system. The mobile couplings are used in many power transmissions at cars, road trucks, railway trucks, ships and other industrial systems. First it is presented the structural scheme of the analyzed mobile coupling. Then are defined: the parts of the multibody system associated to the mobile coupling (input and output semicouplings, intermediary element and basis); the body reference frames and also the general reference frame; the geometrical and cinematic constraints. Finally, there are determined the cinematic equations, useful to found the optimal geometrical configuration of the coupling, depending by the initial requests of a mobile coupling (cinematic and constructive conditions).

1. INTRODUCTION

The mobile couplings are used in many power transmissions at cars, road trucks, railway trucks, ships and other industrial systems, in movement and torque transmission between two shafts with parallel axis. The shafts are connected by a kinematical linkage with the possibility to have translations in the transversal plane. These translations are named transversal movements. A transversal coupling is homokinetic if the shafts angular speeds are identical. If the shafts angular speeds are almost identical, the mobile coupling is quasihomokinetic [1].

If the shafts are connected to the basis, it will result the associated mechanism, which is a plane mechanism [1]. The transversal coupling multibody model has, as bodies, the input and output shafts and also, some of the intermediary bodies which have, usually, more than two connections [3, 5, 6, 7]. The studied coupling, patented by Oerlikon in 1926 [8], has the main particularity to have toothed sectors between the intermediary elements (gear-gear) and also between the intermediary elements and input semicoupling (gear-rack).

2. THEORETICAL BASIS

The analysed mobile coupling is composed by two semicouplings and between them there are the intermediary elements (fig. 1) [1].

The bodies of the multibody system are: input semicoupling, 1, intermediary bodies 2 and 3, output semicoupling 4 and the basis 0. Between the bodies there are the restrictions detailed in table 1 and figure 1. The mobility of the associated mechanism multibody system is [3, 6, 7]

$$M = 3(n_b - 1) - \sum g_c = 3(5 - 1) - 11 = 1, \quad (1)$$

where $n_b=5$ is the number of the associated mechanism bodies (including the basis) and $\sum g_c=11$ is the number of the geometrical constraints between the bodies.

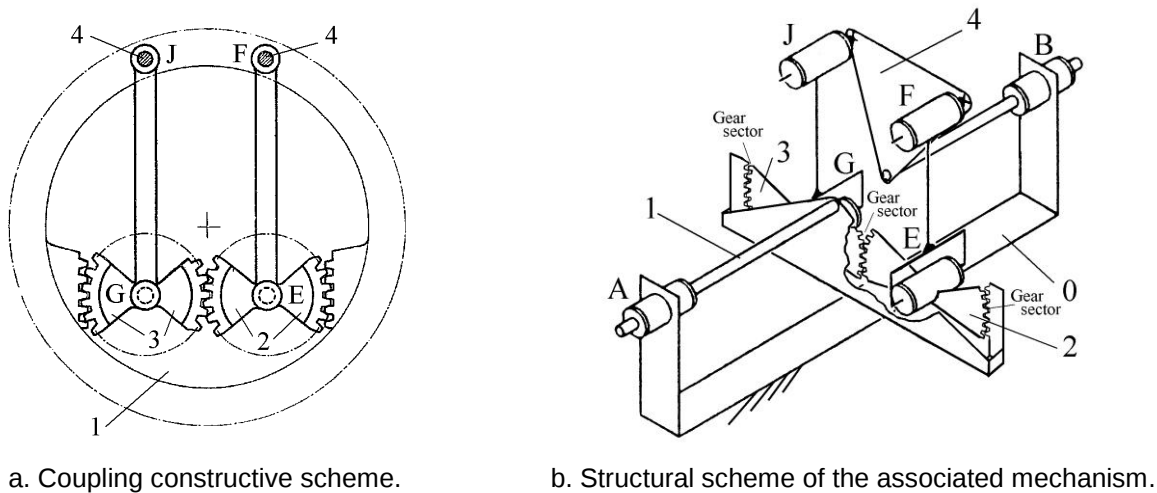


Figure 1. The mobile coupling

Table 1: Restrictions

Body i – Body j	Geometrical constraint	Joint	Number of restrictions
0 – 1	R	A	2
0 – 3	R	B	2
1 – 2	Gear sector	Gear-rack	2
1 – 3	Gear sector	Gear-rack	2
2 – 3	Gear sector	Gear-gear, EG constant	1
2 – 4	RR	EF	1
3 – 4	RR	GJ	1

For the mobile transversal coupling shown in figure 1, the geometrical and kinematical multibody model is presented in figure 2. The interest point's coordinates are presented in table 2.

To define the geometrical restrictions, is necessary to know the point coordinates relative to the fixed coordinates system. The general relation of these coordinates is [7]:

$$\begin{bmatrix} x_{M_i} \\ y_{M_i} \end{bmatrix} = \begin{bmatrix} x_{0i} \\ y_{0i} \end{bmatrix} + \begin{bmatrix} \cos \varphi_i & -\sin \varphi_i \\ \sin \varphi_i & \cos \varphi_i \end{bmatrix} \begin{bmatrix} r_{ix} \\ r_{iy} \end{bmatrix}, \quad (2)$$

where $i=1, 2, 3, 4$, for mobile bodies.

Geometrical restrictions equations are obtained from the geometrical restrictions between the bodies and are presented as follow.

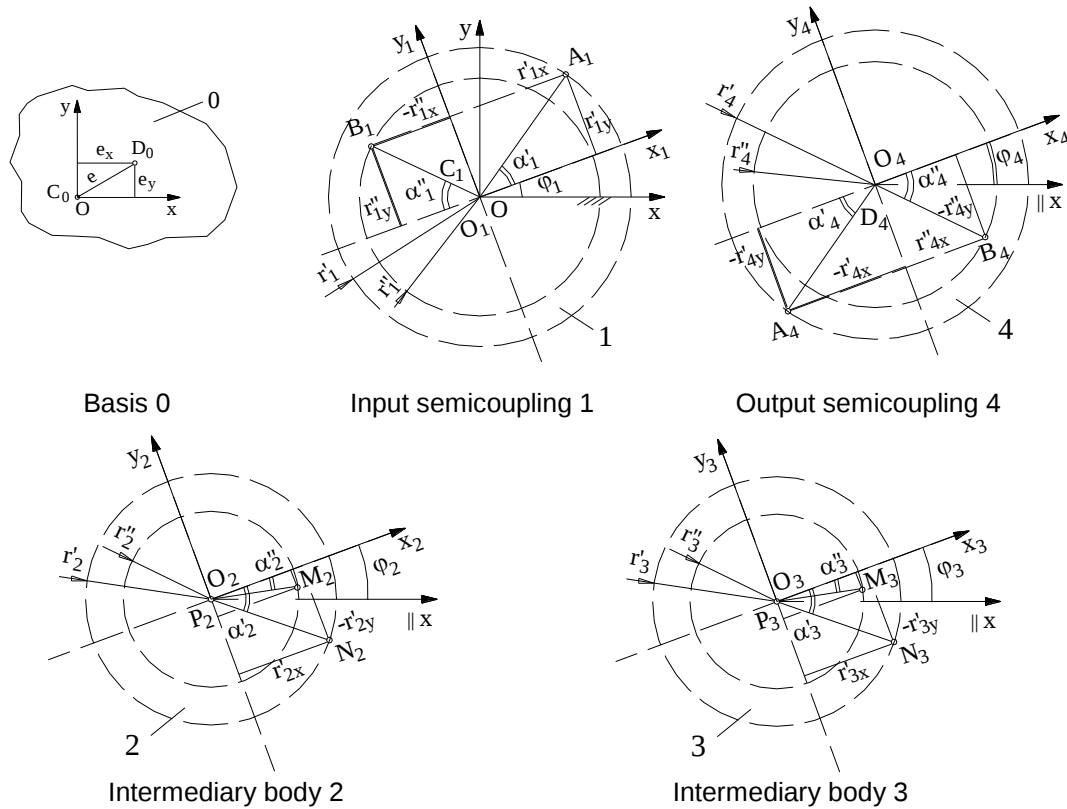


Fig. 2. The geometrical and kinematical multibody model

Table 2: Points coordinates relative to the local coordinate system.

Body	Points coordinates
Basis 0	$C_0(0, 0); D_0(e_x, e_y).$
Input semicoupling 1	$A_1(r'_{1x}, r'_{1y}), B_1(-r''_{1x}, r''_{1y}), C_1(0, 0),$ where $\begin{cases} r'_{1x} = r'_1 \cos \alpha'_1 \\ r'_{1y} = r'_1 \sin \alpha'_1 \end{cases}$ and $\begin{cases} r''_{1x} = r''_1 \cos \alpha''_1 \\ r''_{1y} = r''_1 \sin \alpha''_1 \end{cases}$
Intermediary body 2	$M_2(r''_{2x} - r''_{2y}), N_2(r'_{2x} - r'_{2y}), P_2(0,0)$ where $\begin{cases} r''_{2x} = r''_2 \cos \alpha''_2 \\ r''_{2y} = r''_2 \sin \alpha''_2 \end{cases}$ and $\begin{cases} r'_{2x} = r'_2 \cos \alpha'_2 \\ r'_{2y} = r'_2 \sin \alpha'_2 \end{cases}$
Intermediary body 3	$M_3(r''_{3x_1} - r''_{3y}), N_3(r'_{3x_1} - r'_{3y}), P_3(0,0)$ where $\begin{cases} r''_{3x} = r''_3 \cos \alpha''_3 \\ r''_{3y} = r''_3 \sin \alpha''_3 \end{cases}$ and $\begin{cases} r'_{3x} = r'_3 \cos \alpha'_3 \\ r'_{3y} = r'_3 \sin \alpha'_3 \end{cases}$
Output semicoupling 4	$A_4(-r'_{4x_1} - r'_{4y}), B_4(r''_{4x_1}, -r''_{4y}), D_4(0, 0)$ unde $\begin{cases} r'_{4x} = r'_4 \cos \alpha'_4 \\ r'_{4y} = r'_4 \sin \alpha'_4 \end{cases}$ unde $\begin{cases} r''_{4x} = r''_4 \cos \alpha''_4 \\ r''_{4y} = r''_4 \sin \alpha''_4 \end{cases}$

For the studied mobile transversal coupling multibody model, the generally geometrical restrictions equations are [2, 3, 6, 7]:

- for rotation

$$P_i \equiv P_j, \quad (3)$$

- for rotation-rotation

$$(x_{Pj} - x_{Pi})^2 + (y_{Pj} - y_{Pi})^2 = l^2, \quad (4)$$

- for gearing

$$v_{Pi} = v_{Pj}. \quad (5)$$

The kinematic restriction equation is

$$\rho_1 - f(t) = 0. \quad (6)$$

Based on the relations (3)...(6), it is obtained an equation system with 12 equations and 12 unknowns: x_{01} , y_{01} , φ_1 , x_{02} , y_{02} , φ_2 , x_{03} , y_{03} , φ_3 , x_{04} , y_{04} , φ_4 . It results

$$x_{01} = 0; \quad y_{01} = 0, \quad (7)$$

$$x_{04} = e_x; \quad y_{04} = e_y, \quad (8)$$

$$x_{P2} - x_{A1} = 0; \quad y_{P2} - y_{A1} = 0 \quad (9)$$

$$x_{P3} - x_{B1} = 0; \quad y_{P3} - y_{B1} = 0 \quad (10)$$

$$v_{M2} = v_{B4} \quad (11)$$

$$v_{M3} = v_{A4} \quad (12)$$

$$v_{N2} = v_{N3} \quad (13)$$

To resolve the equation system, it is necessary to take account by the constructive conditions, as follow:

- at the couplings of this type, the construction of semicouplings is symmetric: $r_1' = r_1''$, respectively $r_4' = r_4''$ and $\alpha_1' = \alpha_1''$, respectively $\alpha_4' = \alpha_4''$.

- the linkages between the bodies 2 and 4 respectively 3 and 4 have the same length $l_1' = l_1'' = l_1$;

- the intermediary bodies 2 and 3 have the same dimensions $r_2'' = r_3''$ and $\alpha_2'' = \alpha_3''$, respectively $r_2' = r_3' = r_w$ (for gearing sector) and $\alpha_2' = \alpha_3'$;
- the gearing module is the same;
- also, is necessary to be mentioned the particularity $M_2M_3 \parallel A_1B_1 \parallel A_4B_4$ and the length of this is $M_2M_3 = A_4B_4 = l_2$, for coupling eccentricity $e=0$.

3. RESULTS

Previous relations led to

$$\begin{aligned}
 & 2x_{04}r_1'[\cos(\alpha_4' + \varphi_4) - \cos(\alpha_1' + \varphi_1)] + 2y_{04}r_1'[\sin(\alpha_4' + \varphi_4) - \sin(\alpha_1' + \varphi_1)] + 2x_{04}r_1''[\cos(\alpha_4'' - \varphi_4) - \cos(\alpha_1'' - \varphi_1)] + \\
 & + 2y_{04}r_1''[\sin(\alpha_4'' - \varphi_4) - \sin(\alpha_1'' - \varphi_1)] - 2r_2''[\cos(\varphi_2 - \varphi_4 - \alpha_2'' + \alpha_4'') - \cos(\varphi_1 - \varphi_3 - \alpha_1'' + \alpha_3'')] - \\
 & - 2r_3''[\cos(\varphi_3 - \varphi_4 - \alpha_3'' - \alpha_4') - \cos(\varphi_1 - \varphi_2 + \alpha_1' + \alpha_2'')] - 2r_1'r_4''[\cos(\varphi_1 - \varphi_4 + \alpha_1' + \alpha_4'') - \cos(\varphi_1 - \varphi_4 - \alpha_1'' - \alpha_4')] = 0.
 \end{aligned} \quad (14)$$

Because $v_{A4} = v_{B4}$ from relations (11) and (12) will result

$$v_{M2} = v_{M3} \quad (15)$$

Also, for gearing sector between the intermediary bodies, relation (13) led to the gearing ratio [2, 4]

$$i = \frac{\omega_2}{\omega_3} = \frac{r_{w3}}{r_{w2}} = \frac{z_3}{z_2} = 1, \quad (16)$$

for the considered constructive conditions $r_{w2} = r_{w3} = r_w$ (and also $z_2 = z_3$).

Integrating, $\dot{\varphi} = \omega$, will result $\varphi_2 = \varphi_3 + C$. For $C=0$, will obtain

$$\varphi_2 = \varphi_3 \quad (17)$$

Theoretically, relations (14) and (16) led to the coupling homokinetism condition

$$\varphi_4 = \varphi_1. \quad (18)$$

But, in the real case, because of the gearing clearance,

$$\varphi_2 \approx \varphi_3 \quad (19)$$

which led to the coupling quasihomokinetism condition

$$\varphi_4 \approx \varphi_1. \quad (20)$$

4. CONCLUSIONS

In the case of the studied mobile coupling with toothed sector, as multibody system with four mobile bodies, the homokinetism is given by $\varphi_1 = \varphi_4$, in the condition $\varphi_2 = \varphi_3$, according to the constructive particularities relative to the geometry of the mobile bodies. Specifying the coupling constructive condition is important here, because is useful in coupling's dynamic behavior and also in manufacturing process [1, 7].

Because of the gearing clearance, the real coupling became quasihomokinetic, and $\Delta\varphi = \varphi_2 - \varphi_3 \approx \text{const}$, so the shafts angular speeds are almost identical.

The method can be applied also for other known mobile couplings, as multibody systems with four or five mobile bodies and for other new solutions of mobile couplings, identified previously by the authors in structural analysis.

In the future researches, the author intend to find the coupling optimal shape configuration, in the design process.

References:

- [1]. Dudiță, Fl., Diaconescu, D., Cuplaje mobile articulate. Ed. Orientul Latin, Brașov, 2001.
- [2]. Dudiță, Fl., Diaconescu, D., Curs de mecanisme. Fascicula 3, Cinematica mecanismelor cu roți dințate. Ed. Universității din Brașov, Brașov, 1984.
- [3]. Gavrilă, C.C., Comparative Kinematics Of Mobile Transversal Coupling, As Multibody System. Proceedings Of The Second European Conference on Mechanism Science EUCOMES 08, Cassino, Italy, 2008, Springer Science+Business Media B.V. 2009.
- [4]. Moldovean, Gh., ș. a., Angrenaje cilindrice și conice. Vol I, Calcul și construcție. Ed. Lux Libris, Brașov, 2004.
- [5]. Shigley, J. E., Kinematic Analysis of Mechanisms. McGraw-Hill, New York, 1959.
- [6]. Vișa, I., Gavrilă, C. C., Structural Synthesis Of Transversal Couplings By Multibody Systems Method, 12th IFToMM World Congress, Besançon, France, June18-21, 2007, CD-Rom edition.
- [7]. Vișa, I., Alexandru, P., Talabă, D., Alexandru, C., Proiectarea funcțională a mecanismelor. Metode clasice și moderne Ed. Lux Libris, Brașov, 2004.
- [8]. *** Maschinenfabrik Oerlikon, Kupplung. Patent no. 121.696, Hauptpatent Schweizerische Eidgenossenschaft, Swiss, 1926.